


Art and imaginative
Curve system

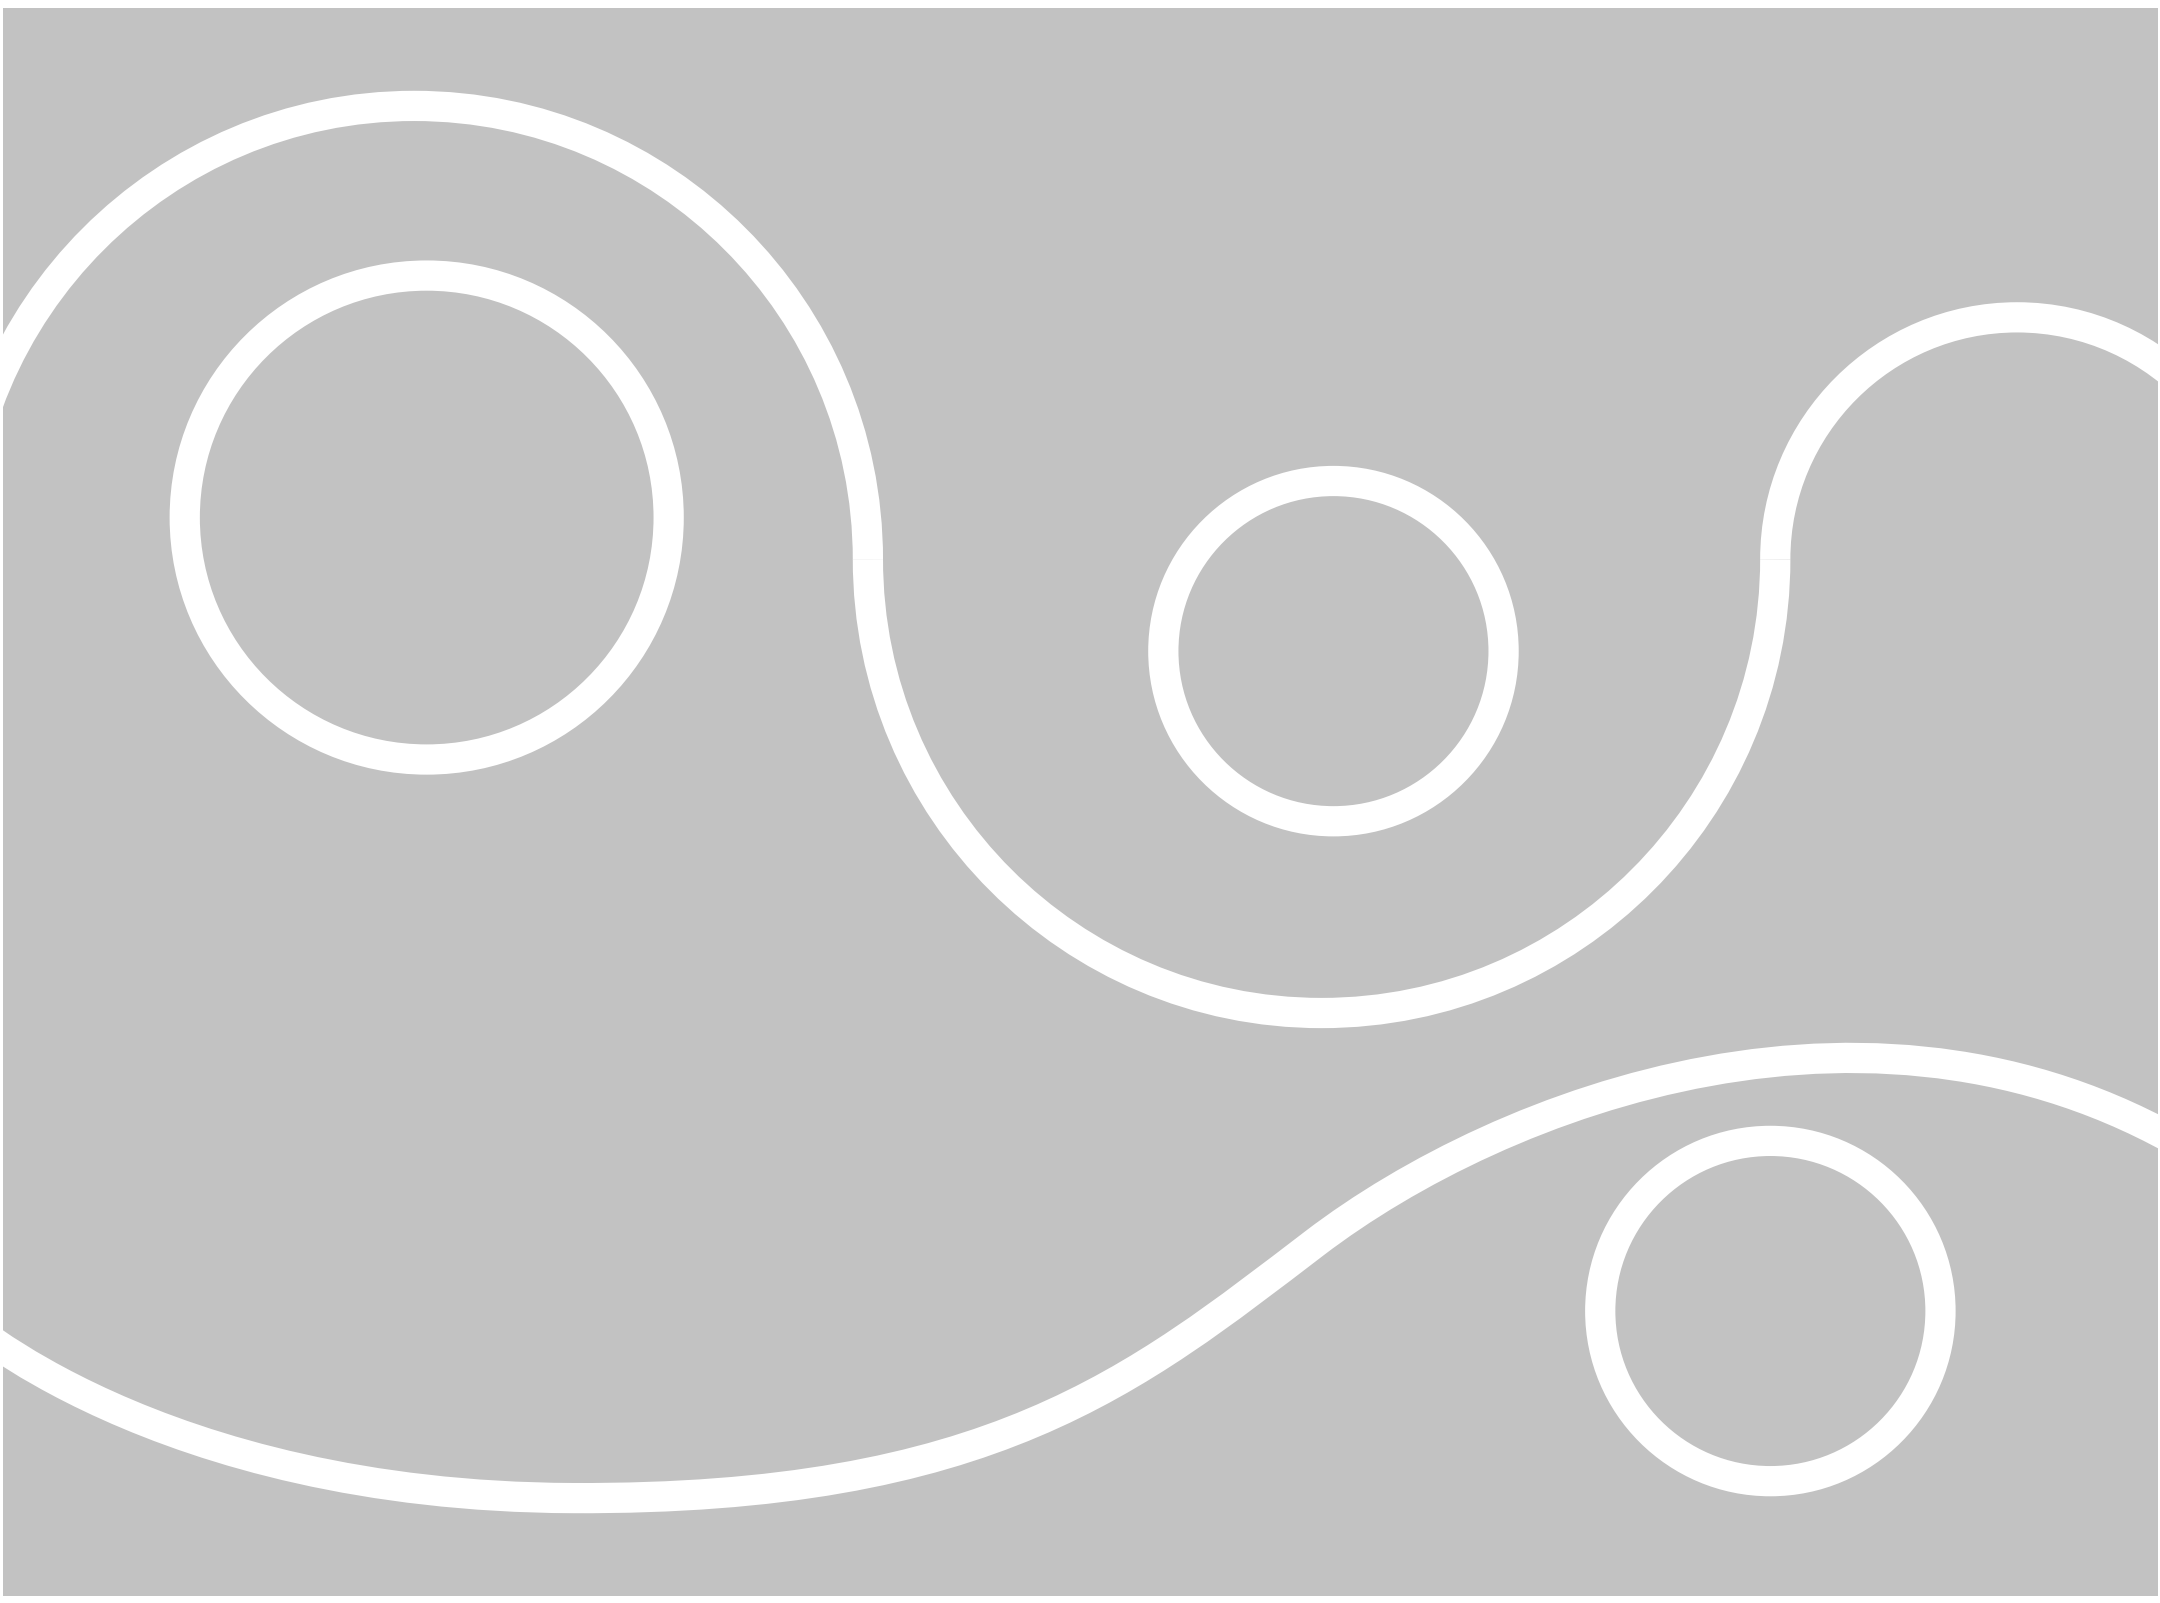


Shape it as you want, like a sculptor carving his vision into life. Let the curved linear lights embrace the architecture, painting a unique masterpiece in the canvas of the city. The harmonious interplay of light and structure, akin to a symphony of your design, can transform the ordinary into the extraordinary. In the city's embrace, let your imagination run wild, and sculpt your dreams with the luminous strokes of creativity.

Shape it as you want

Inspiration

 litofis

Powered
by




Gearlink Tech




Quick assembly

"0" light leakage 



www.litofis.com

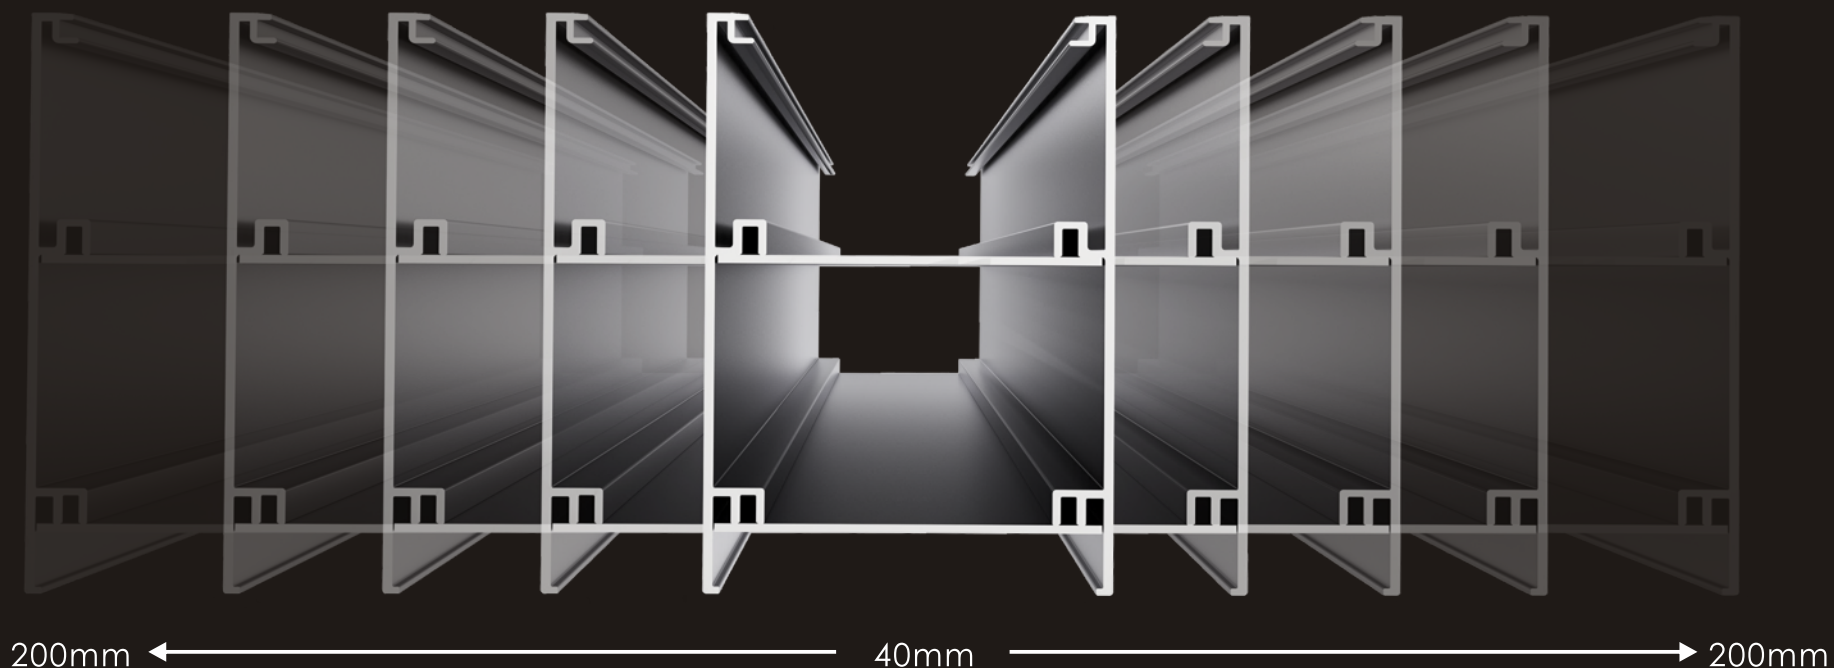

**WIDTH OPTIONS RANGING FROM
40MM TO 200MM.**

Circle and Oval

These circular ring lights are not just sources of light; they are the essence of the architecture, breathing life into these colossal structures. Beneath their flickering glow, the buildings awaken like dormant giants, narrating tales of antiquity and modernity. Each halo is like a poetic verse, etching vibrant chapters onto the pages of the city.

Mounting




Control



Color




Optics

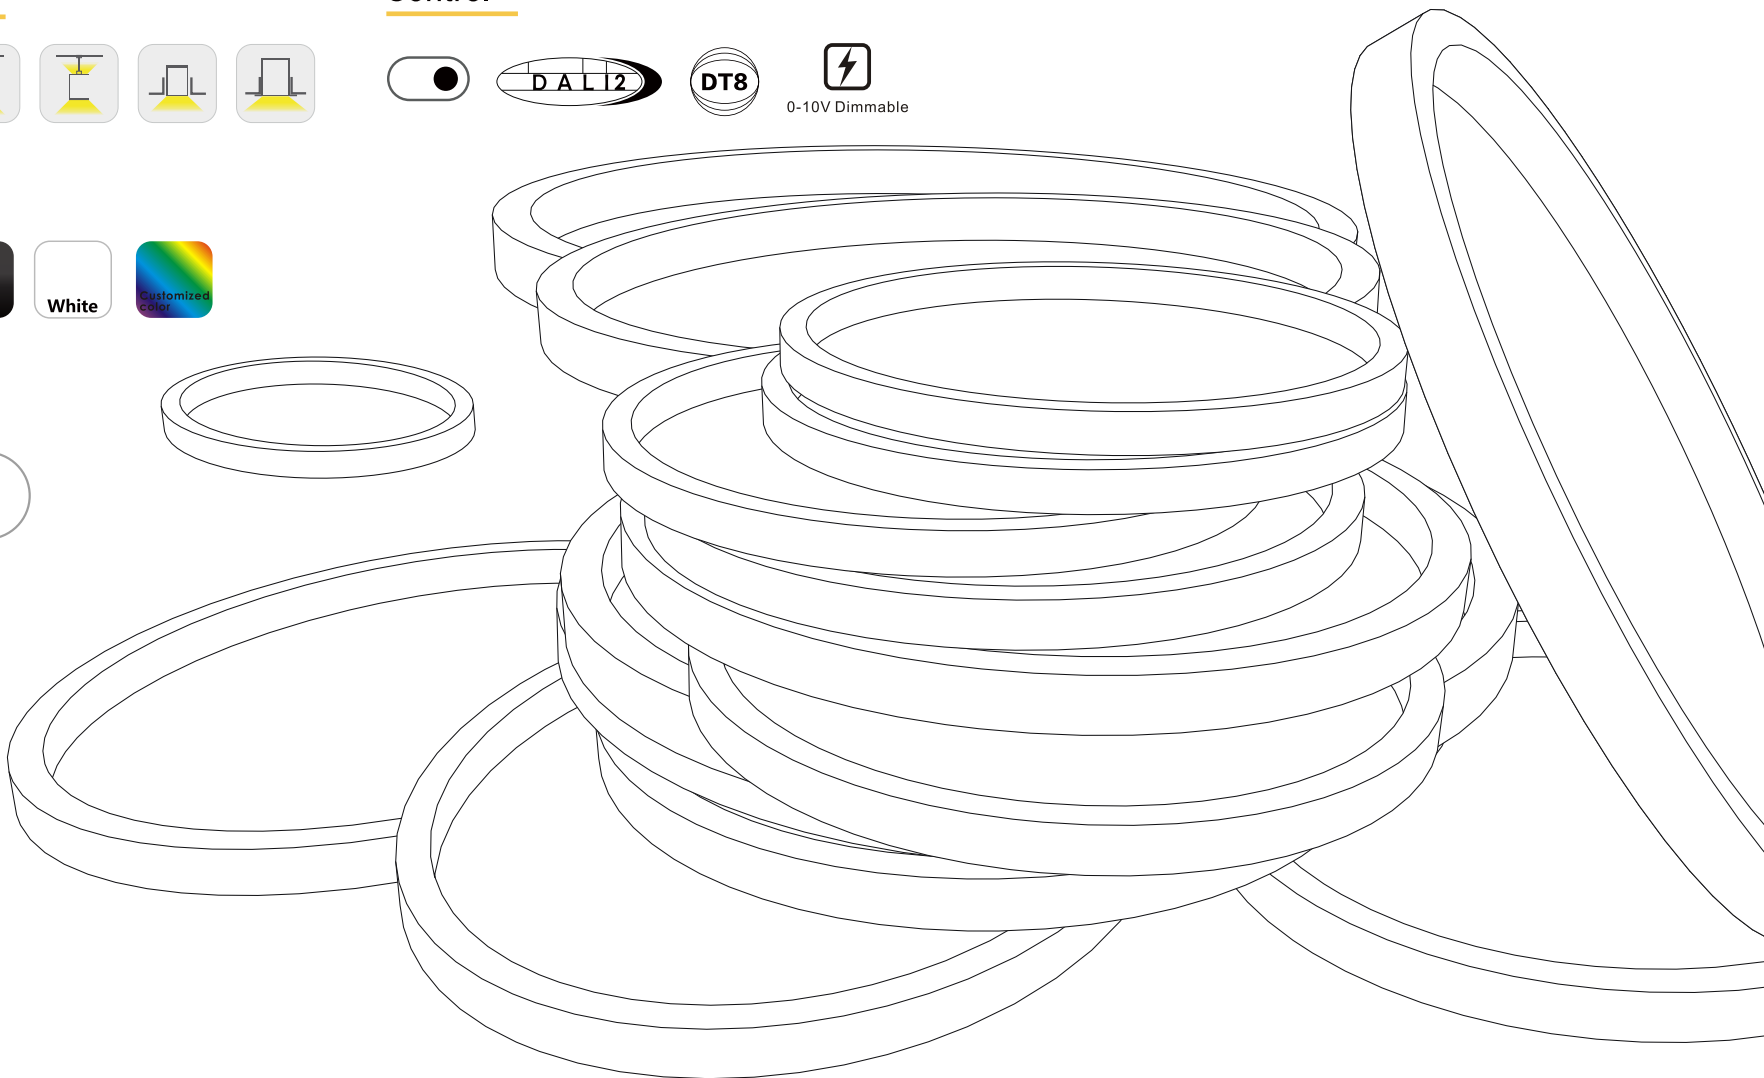




Customized Options

For projects

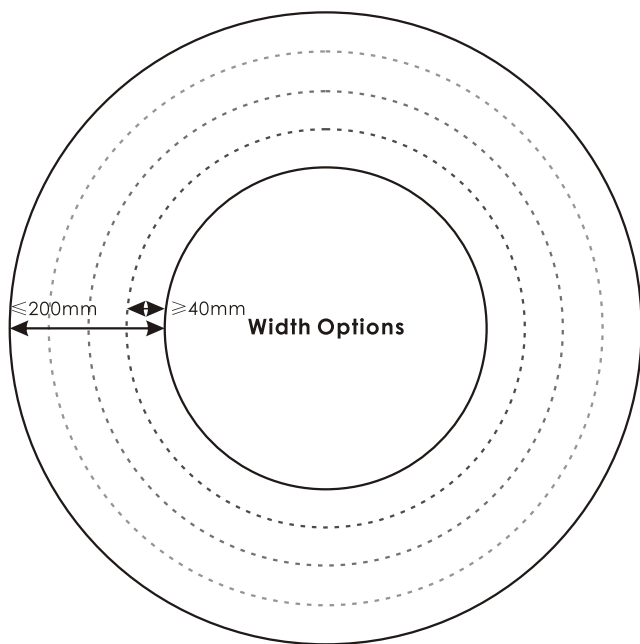


Diameter ≥ 450mm


Profile Dimension



Suspended/Surface Mounted



Trimless Recessed



Trim Recessed

Mounting




Color



Control



Optics



Specification

Diameter	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
≥450mm	Single light / Linkable	220-240VAC	20W/m-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Standard Circles

For
Stock

- 3 mounting ways in one
- Direction&indirection in one,
(Indirection can be switched on/off)
- 3 CCT in one
- 2 diffusers optional
- 4 diameters optional
- Easy installation

3 mounting ways in one


Color
Switchable

3 CCT in one

Indirection control

Indirection can be
switched on/off


Light Distribution



Color



Dimension

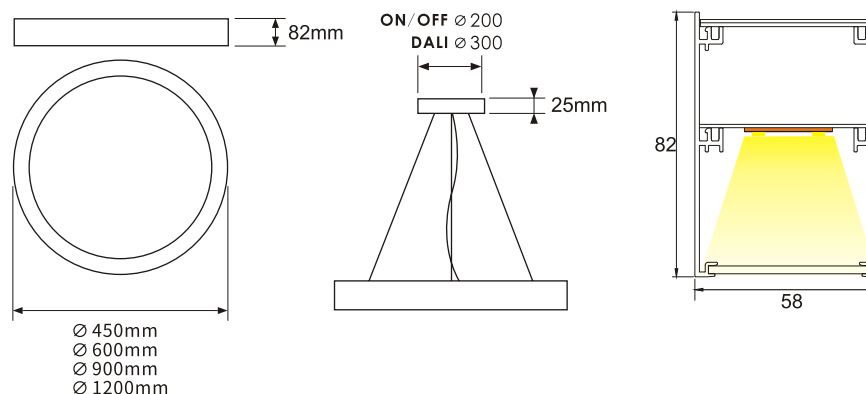

Data sheet

Item	Size	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Driver	Control
CV60-450	D450xW58xH82mm	220-240VAC	38W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
CV60-600	D600xW58xH82mm	220-240VAC	48W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 /DALI DT8(tunable white)
CV60-900	D900xW58xH82mm	220-240VAC	68W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 /DALI DT8(tunable white)
CV60-1200	D1200xW58xH82mm	220-240VAC	95W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)

*Because the driver for 0-10V, DALI or DT8 is too big in size, the circle with dimming function can only be suspended.


*Options:

- Presence and light sensors -2700K or other CCT
- Emergency: 1h or 3h -100-277VAC

Approval



Control



Oblong

The architecture seems like a slumbering dragon, and the Oblong Shape linear lights are the wizards of soft light, gently dispelling the mysteries of the night. They outline the contours of the buildings, akin to an ancient map, leading us into the heart of the city and unveiling its enigmatic veil.

Mounting




Color



Optics





Control

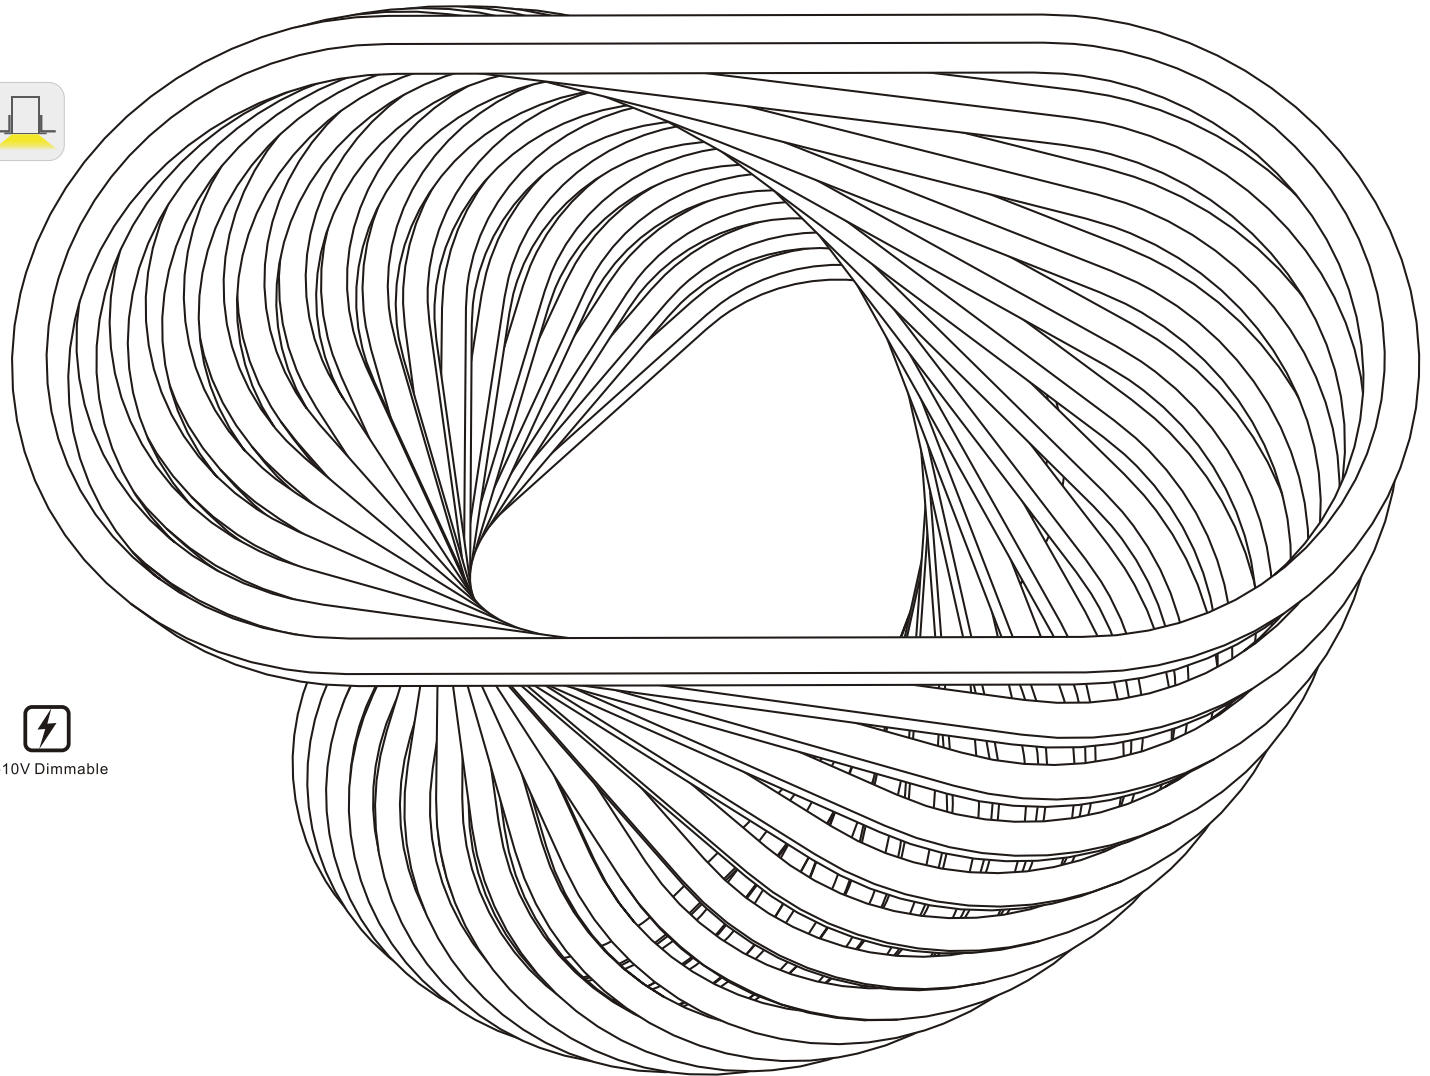






Customized Options

For projects

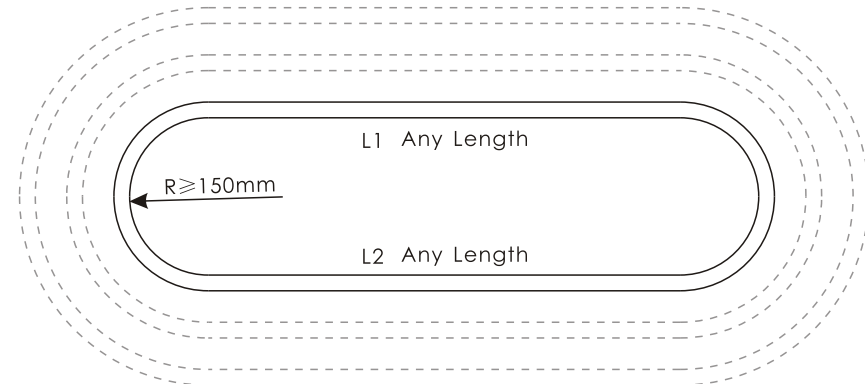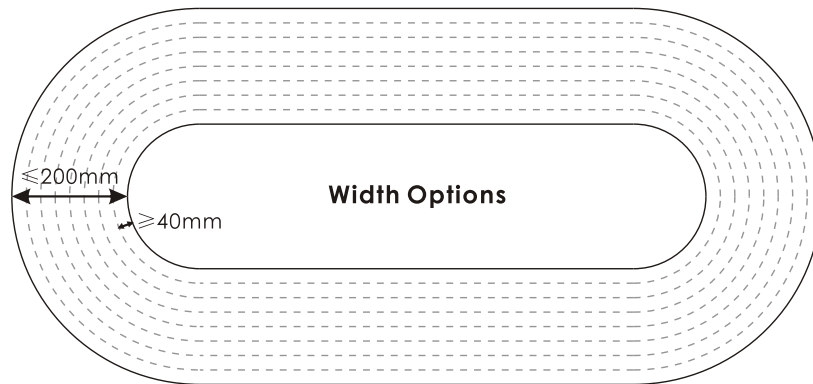

Profile Dimension




Mounting



Control



Optics



Powered by
Gearlink Tech

Color




Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
Customized	Single light / Linkable	220-240VAC	20W/m-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)


Standard Oblong

For
Stock


Light Distribution

Opal direction
& IndirectionMPR direction
& Indirection

Color



Dimension

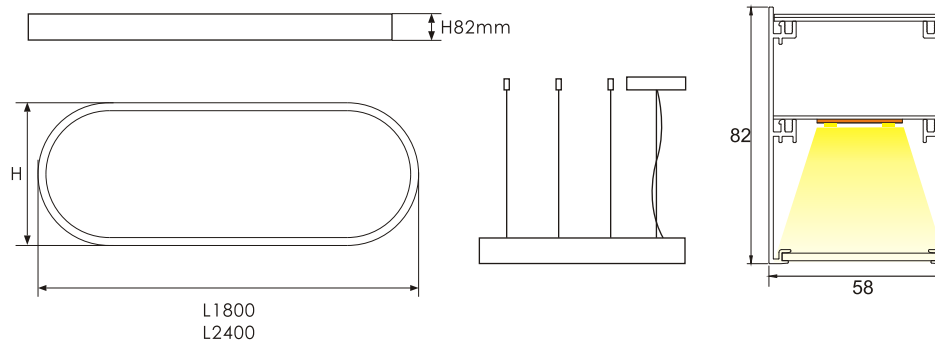

Data sheet

Item	Size	Section dimension	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Driver	Control
RSC-186	L1800*H600mm	W58*H82mm	220-240VAC	85W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
RSC-246	L2400*H600mm	W58*H82mm	220-240VAC	110W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 /DALI DT8(tunable white)
RSC-189	L1800*H900mm	W58*H82mm	220-240VAC	92W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 /DALI DT8(tunable white)
RSC-249	L2400*H900mm	W58*H82mm	220-240VAC	118W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)

*Options:

- Presence and light sensors -2700K or other CCT
- Emergency: 1h or 3h -100-277VAC


Approval



Control Options



3 CCT Switchable



Indirection



On-off



0-10V Dimmable



Round-edge Triangle

The architecture becomes a poem of nature, and the triangular linear lights are the rhythm of this poem, stringing together the contours of the buildings, creating an incredibly abstract canvas. These beams of light, like the wands of magicians, illuminate the mysterious beauty of the architecture, presenting a dazzling concert to the city.


Mounting




Color



Optics





Control

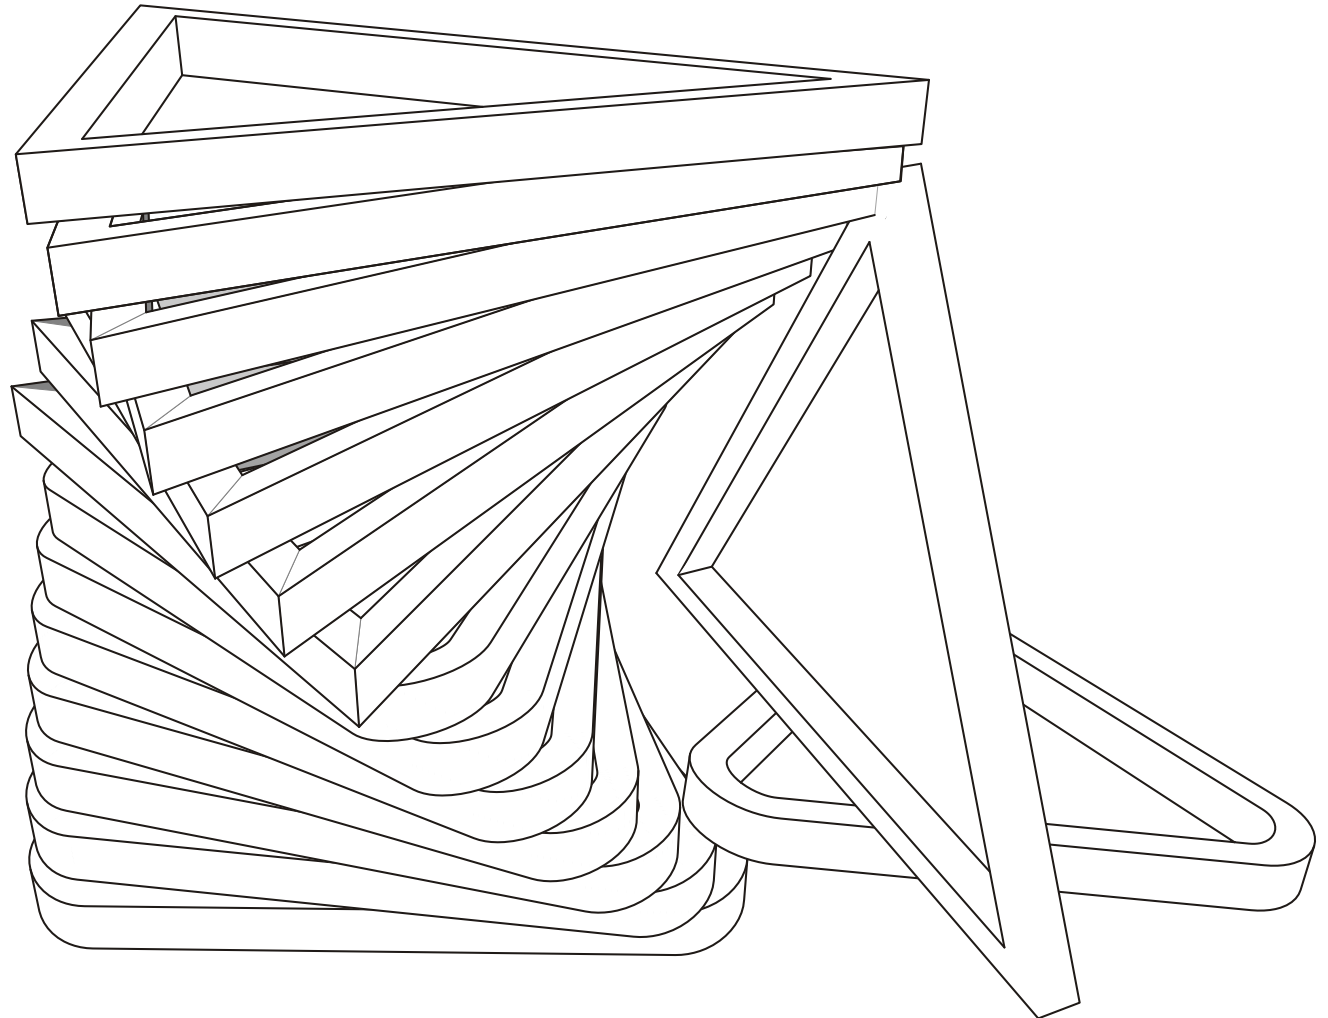


Customized Options

For projects

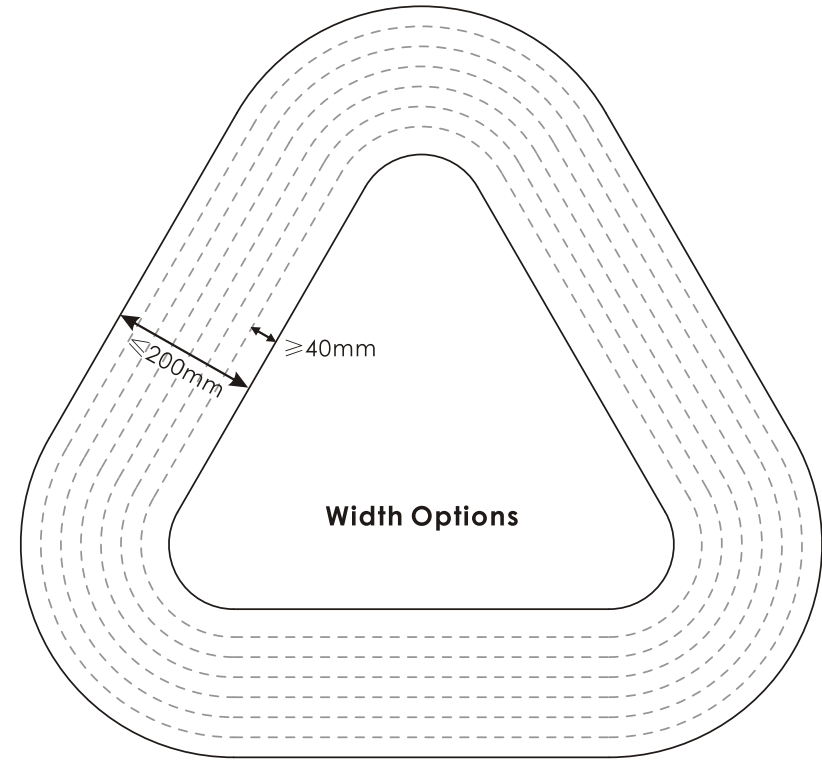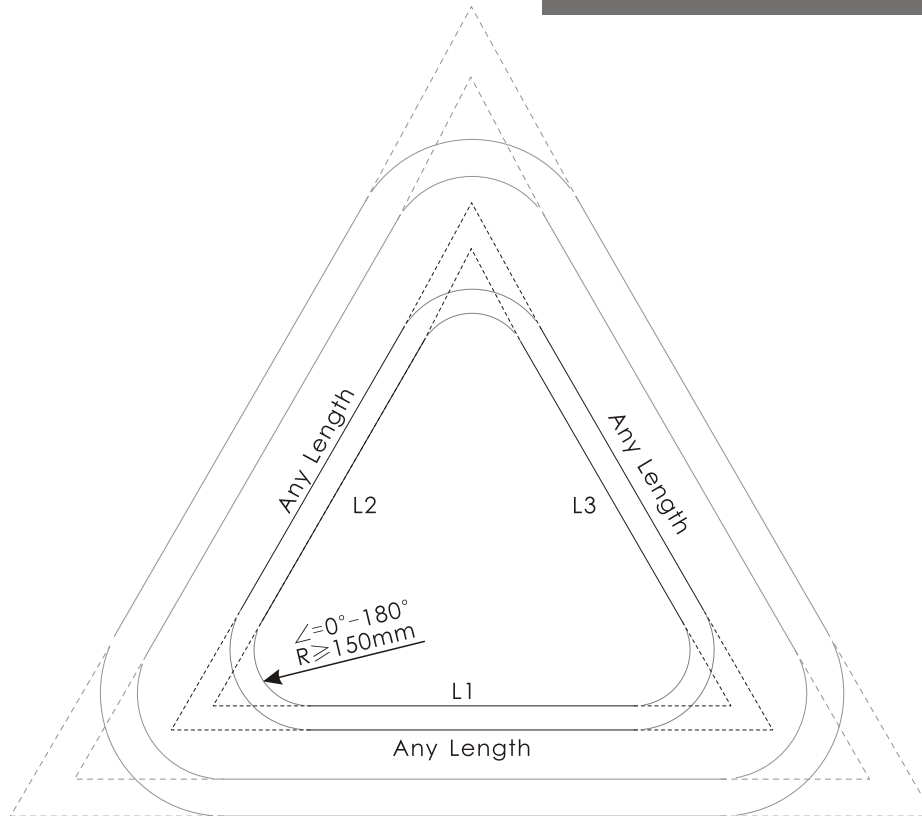

Profile Dimension

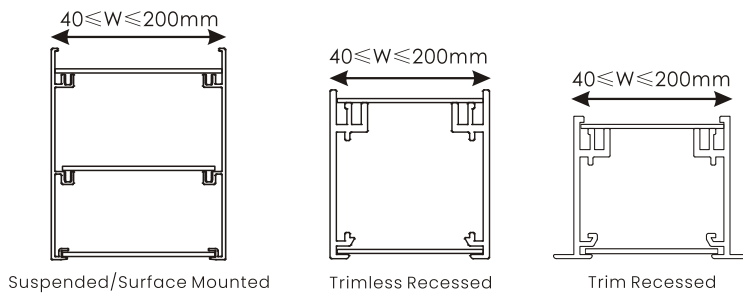

Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
Customized	Single light / Linkable	220-240VAC	20W/m-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Mounting




Control



Color



Optics



Rounded-edge Polygon

The architecture, like a colossal prose poem, and the rounded-edge polygonal linear lights are its footnotes, embellishing the narrative with gentle radiance. They outline the contours of the buildings, like a painter's brush leaving soft imprints on the canvas of the city.

Mounting





Color



Control



Optics

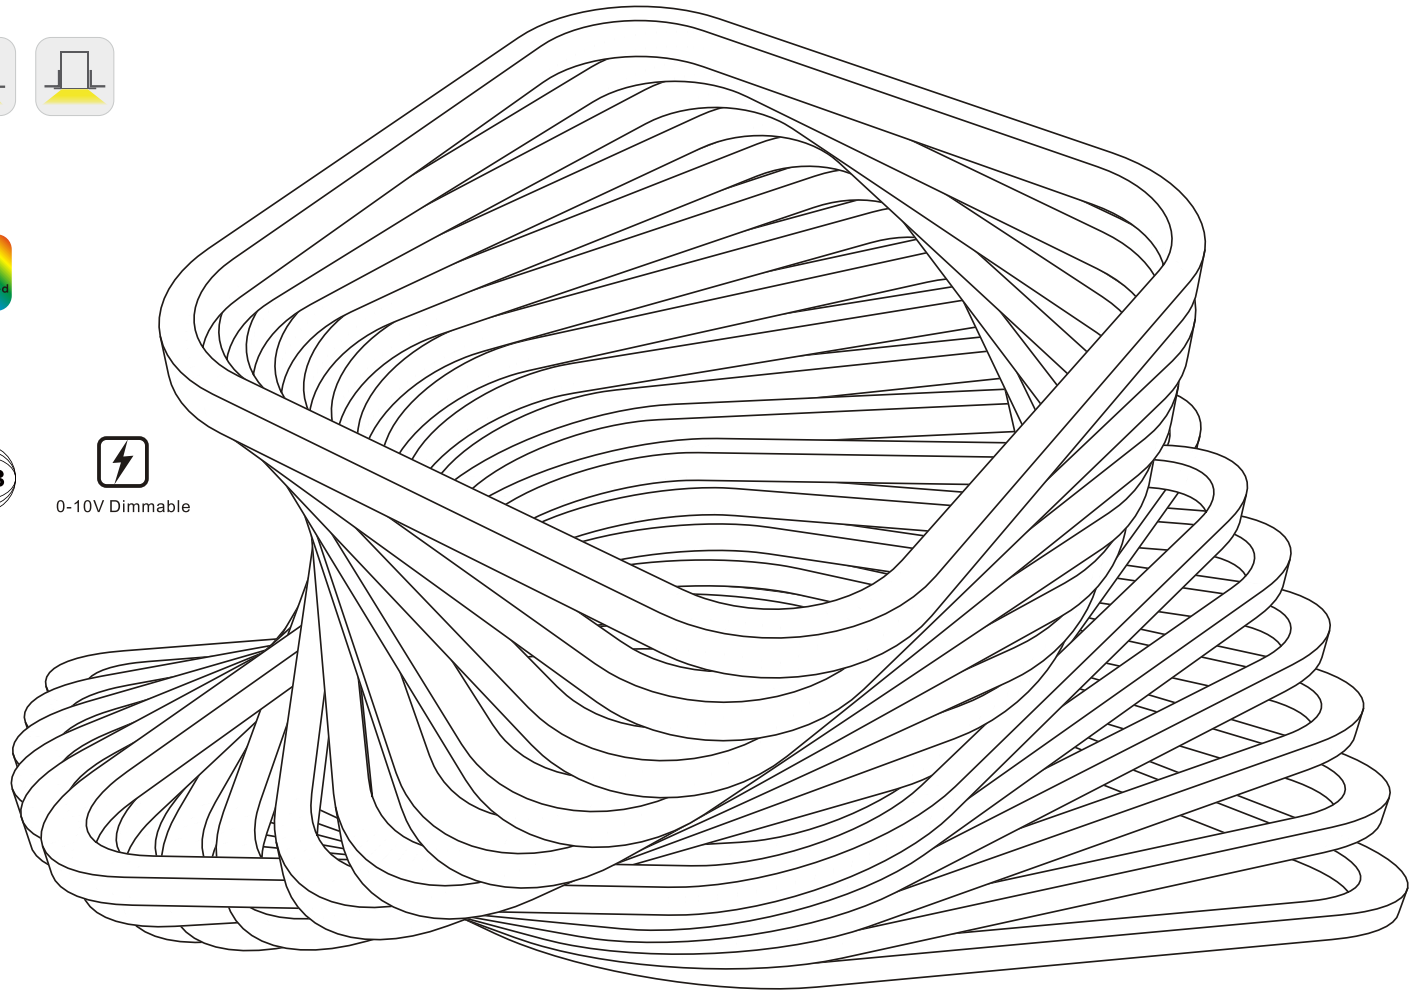








Customized Options

For projects

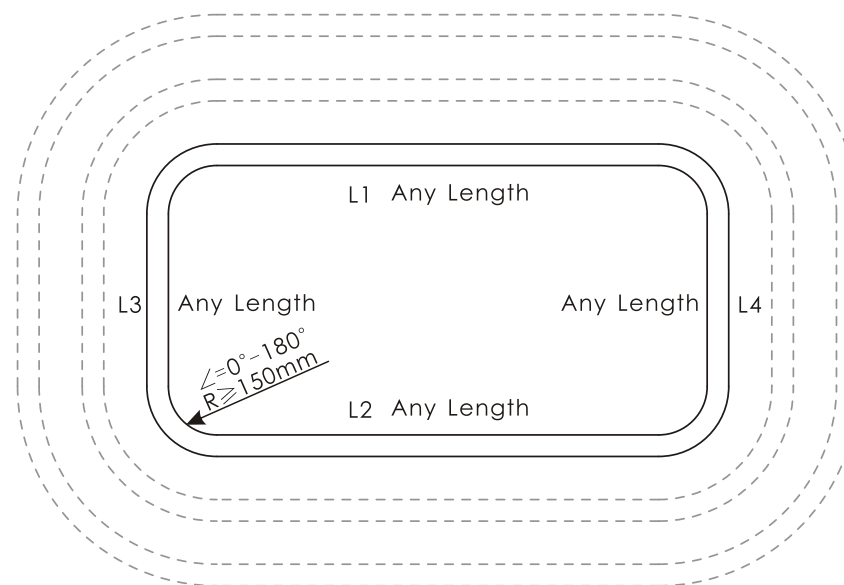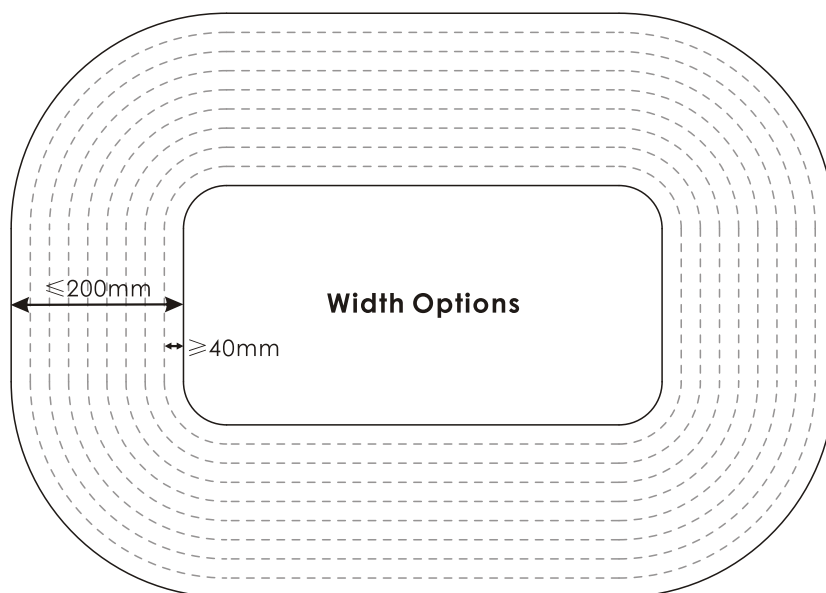

Profile Dimension

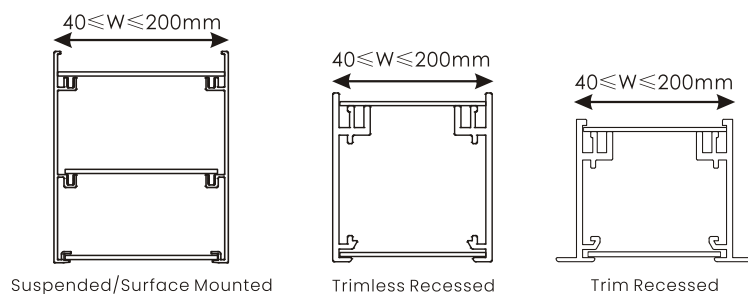

Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
Customized	Single light / Linkable	220-240VAC	20W/m-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Mounting




Control



Color



Optics



S shape

The architecture, resembling a slumbering giant, and the S-shaped linear lights are the conductors of the night, using soft radiance to accentuate the contours of the buildings, akin to a grand canvas. They create a dreamlike atmosphere, transforming the city into a nocturnal concert.

Mounting




Control



Color




Optics

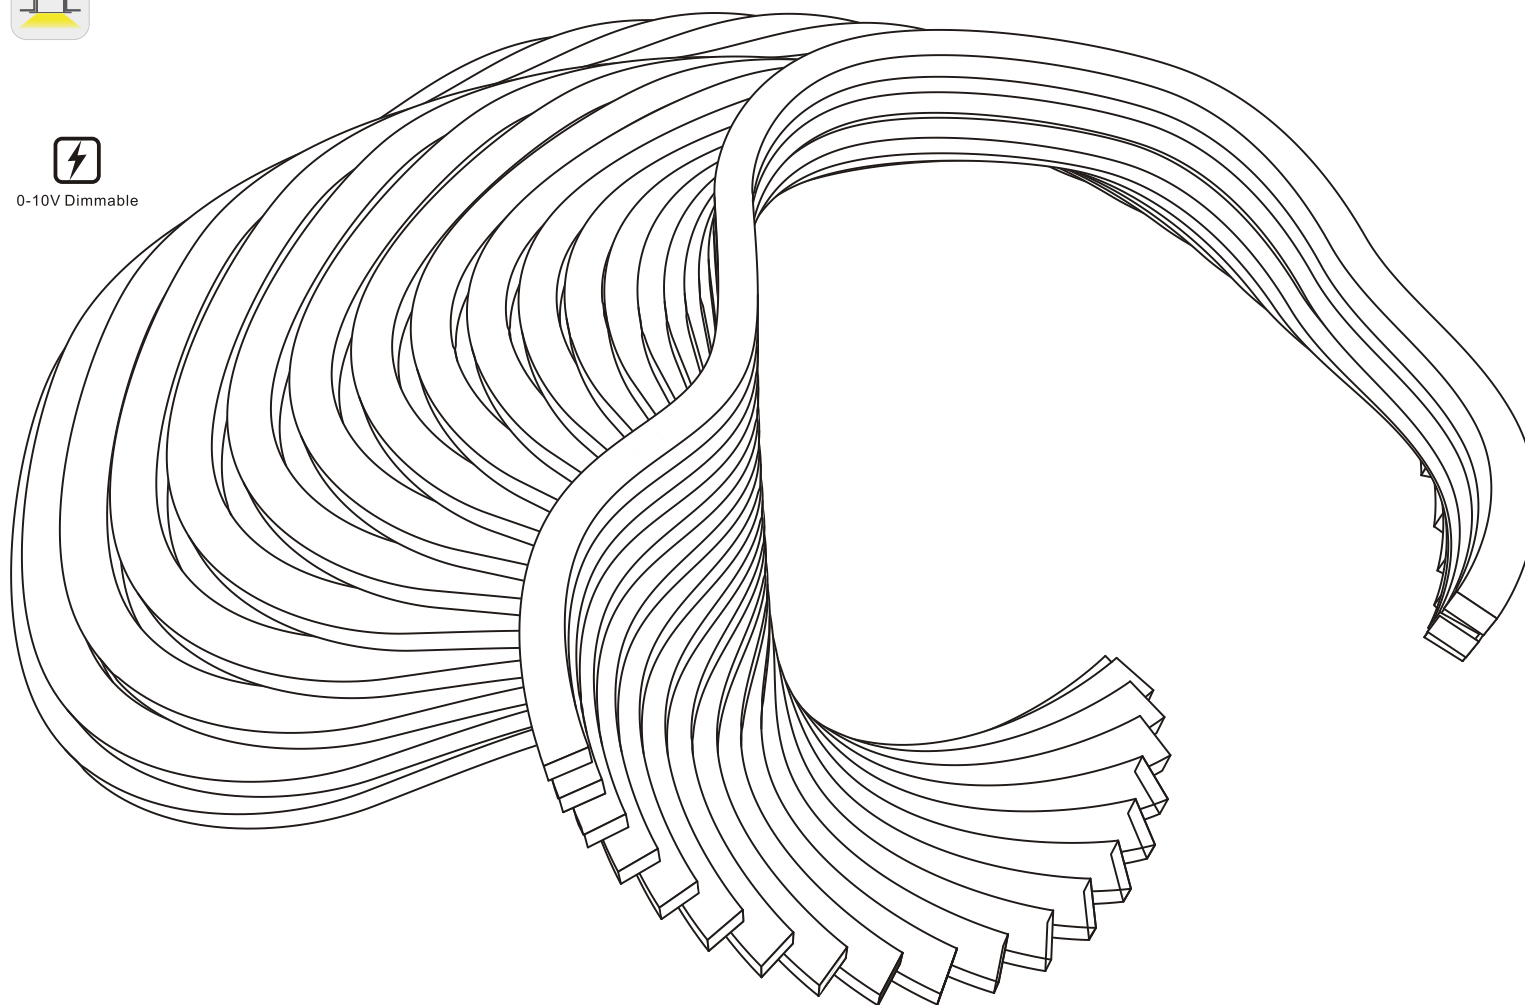


Customized Options

For projects

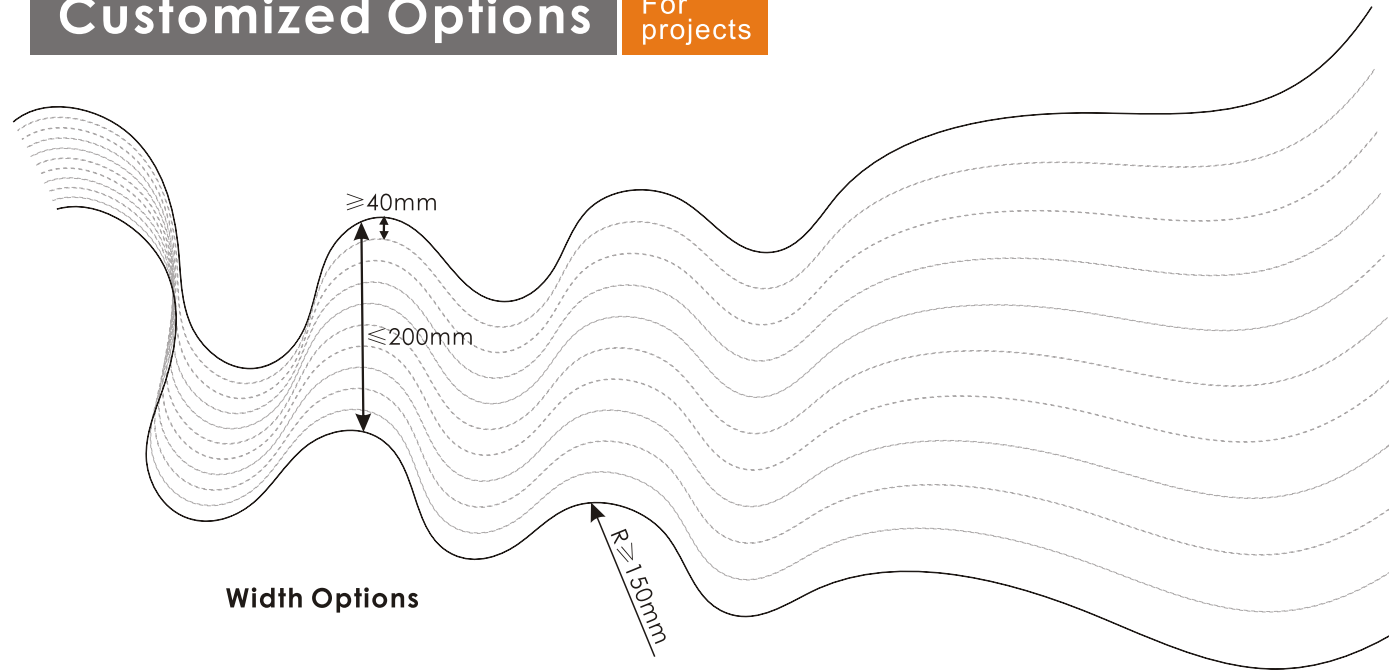

Width Options

Profile Dimension

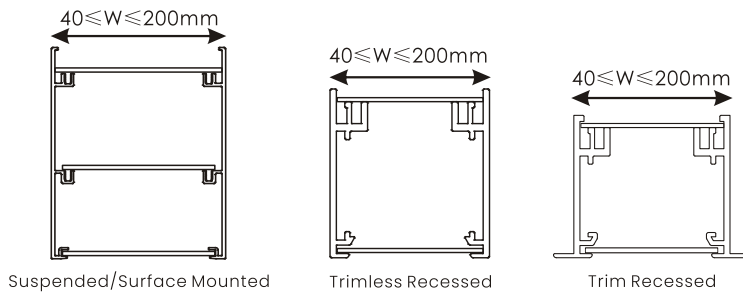

Mounting




Control



Color



Optics



Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
Customized	Single light / Linkable	220-240VAC	20W/m-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Circular panel

In the quietude of the city, as night falls, a wondrous interplay unfolds - the perfect fusion of circular panel lights and architecture, much like a harmonious symphony of chords and melodies. These gentle circular light sources, akin to musical notes, illuminate the contours of the buildings, tracing an eloquent nocturnal composition.

Mounting





Control



Color




Optics

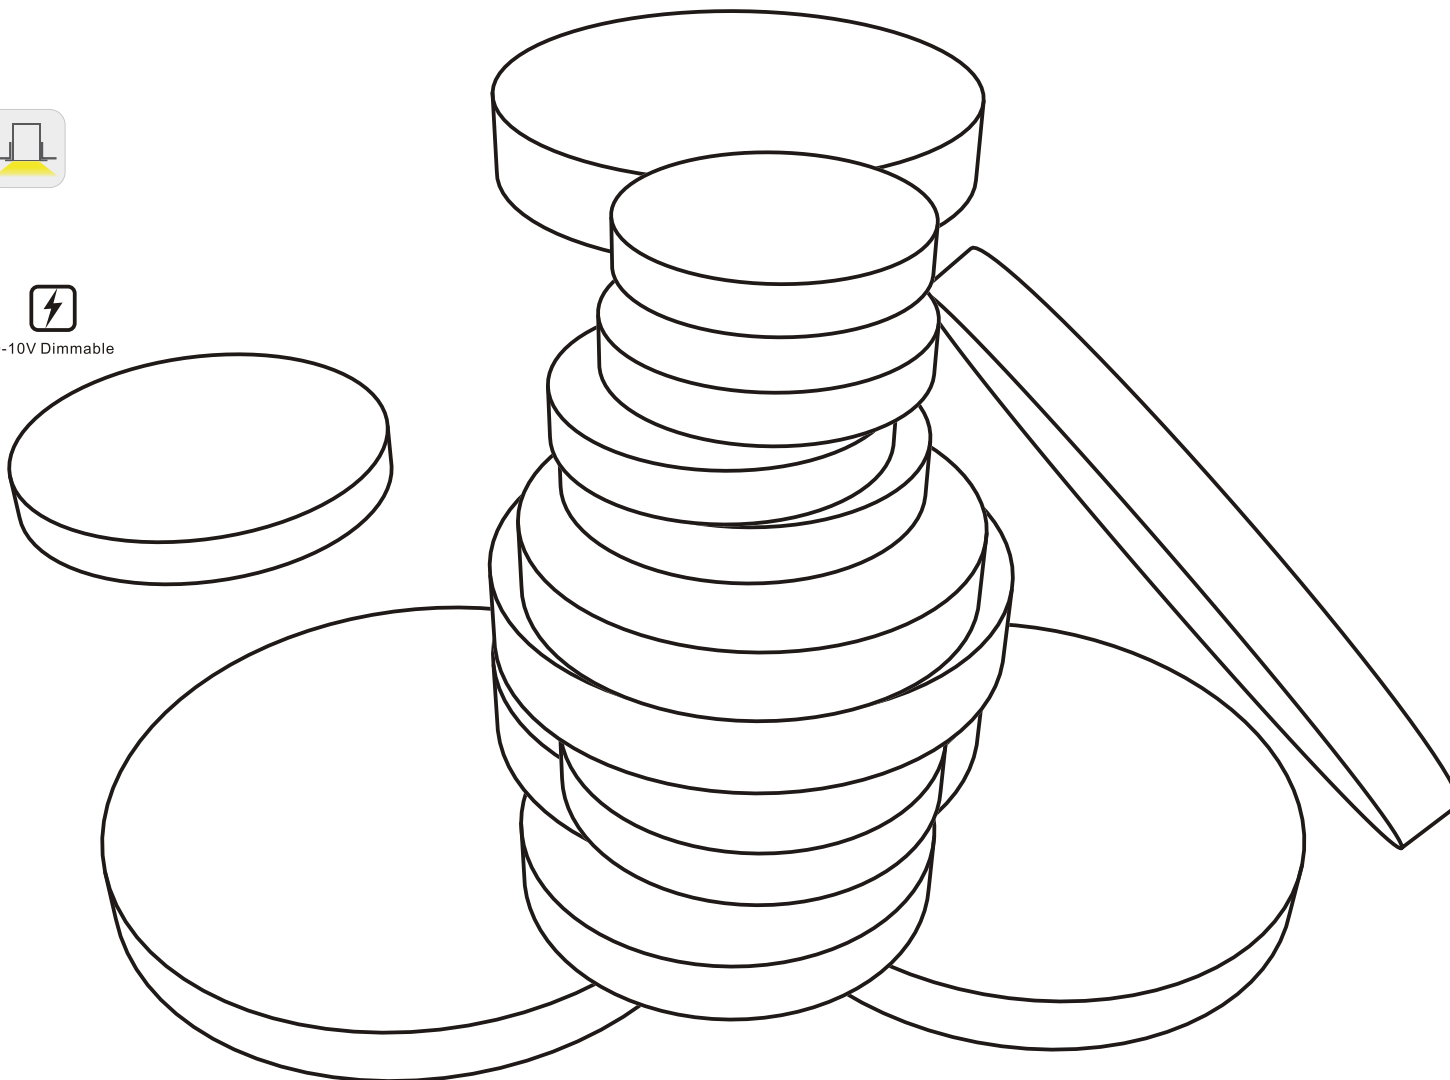




Customized Options For projects

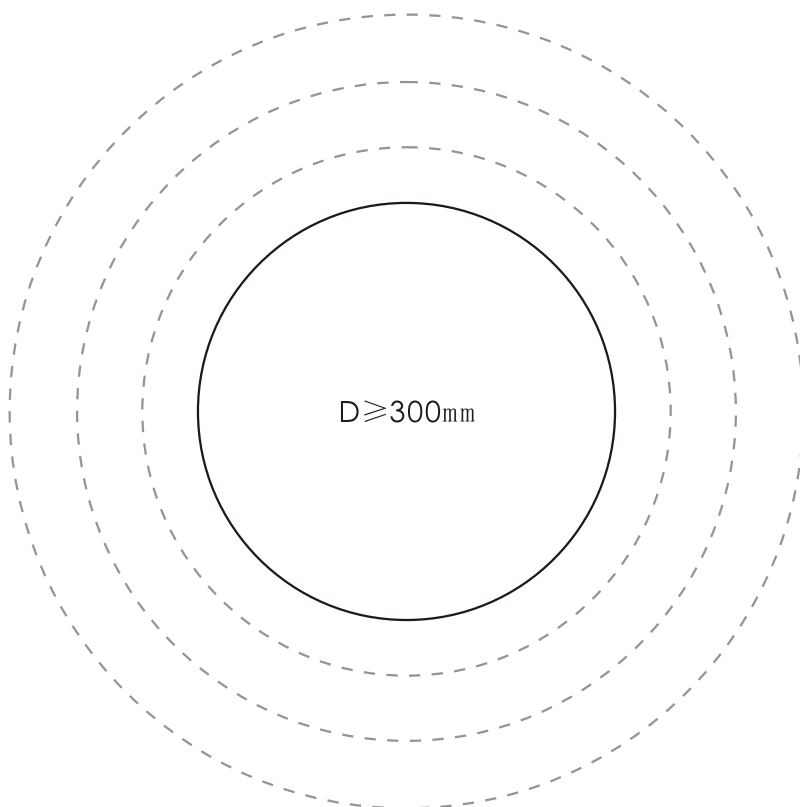

Profile

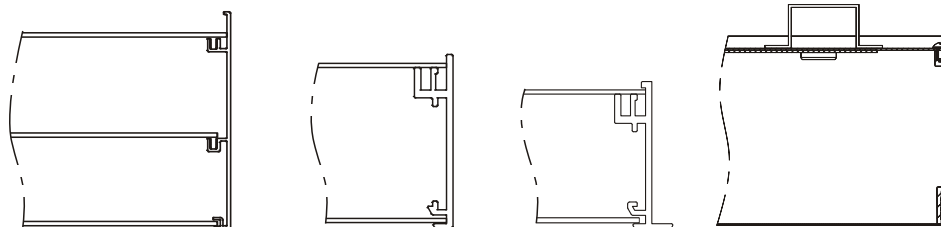

Suspended/Surface Mounted

Trimless Recessed

Trim Recessed

Stretch Fabric

Mounting




Color



Control



Optics



Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
≥300mm	Single light / Linkable	220-240VAC	100W/m²-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic/Stretch Fabric	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Standard Circular panel


For
Stock

- 3 mounting ways in one
- Direction&indirection in one,
(Indirection can be switched on/off)
- 3 CCT in one
- 2 diffusers optional
- 4 diameters optional
- Easy installation


3 mounting ways in one

Color
Switchable

3 CCT in one




Light Distribution

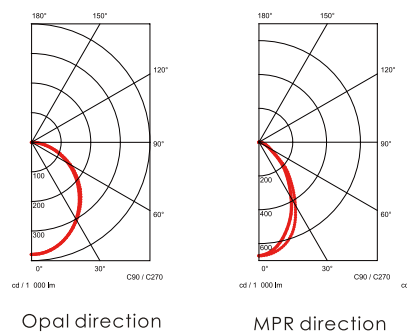

Color



Dimension

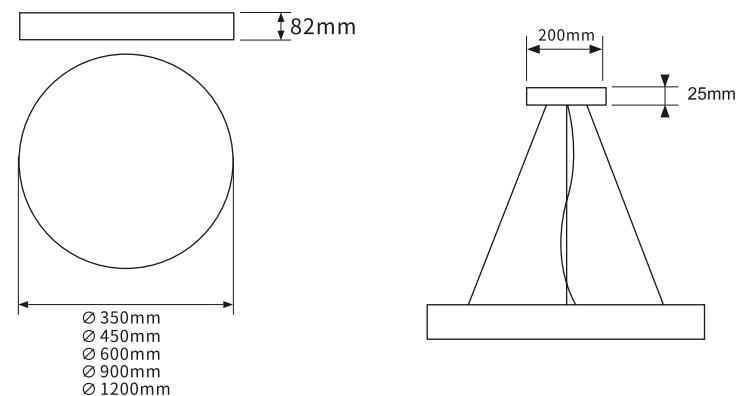

Data sheet

Item	Size	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Driver	Control
CP82-350	D350xH82mm	220-240VAC	35W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
CP82-450	D450xH82mm	220-240VAC	45W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
CP82-600	D600xH82mm	220-240VAC	57W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
CP82-900	D900xH82mm	220-240VAC	84W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
CP82-1200	D1200xH82mm	220-240VAC	153W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)


*Options:

- Presence and light sensors -2700K or other CCT
- Emergency: 1h or 3h -100-277VAC

Approval



Control



Rounded-edge Square or Rectangle Panel

The architecture itself serves as a diary of the city, and the rounded-edge square or rectangle panel lights are the splendid illustrations, embellishing each page with soft radiance. They elevate the appearance of the buildings to a new realm, akin to a city's poetic verses, narrating the tales of time.


Mounting




Color



Optics




Control

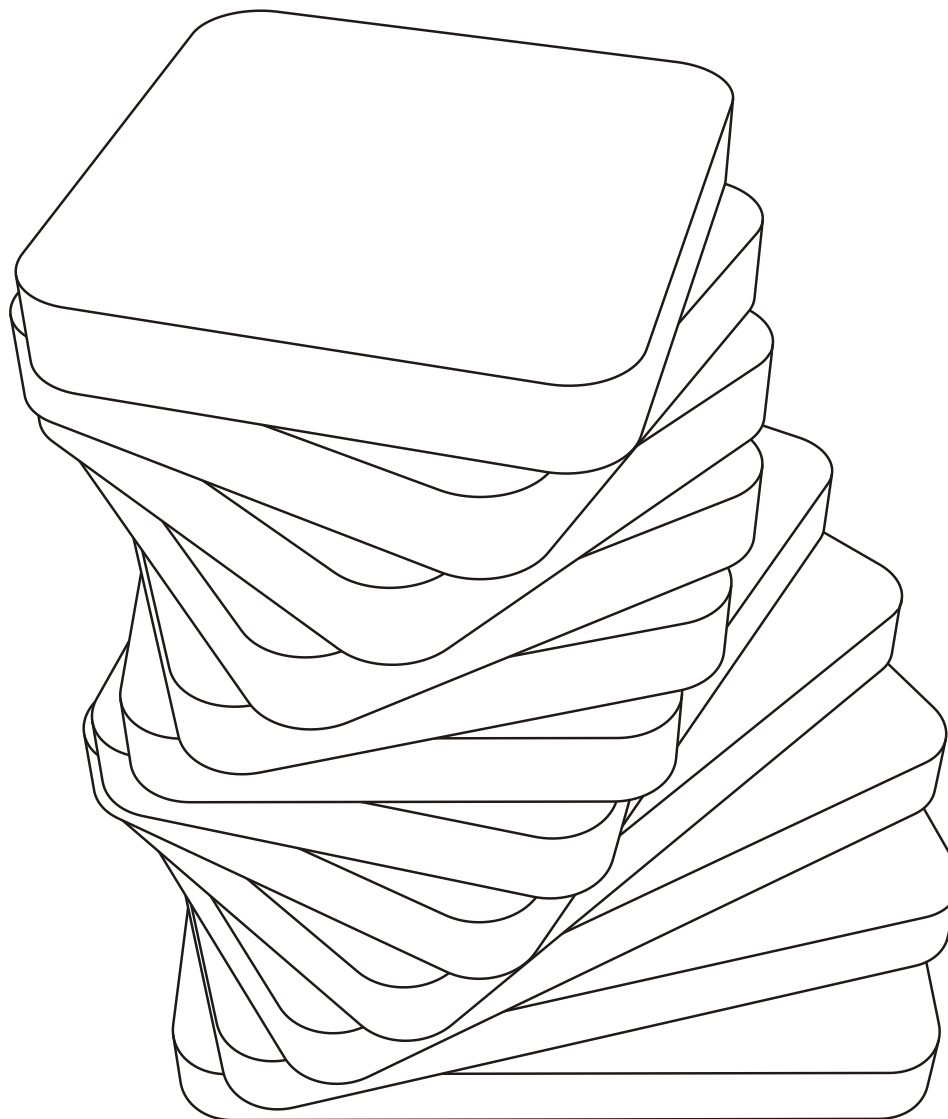






Customized Options For projects

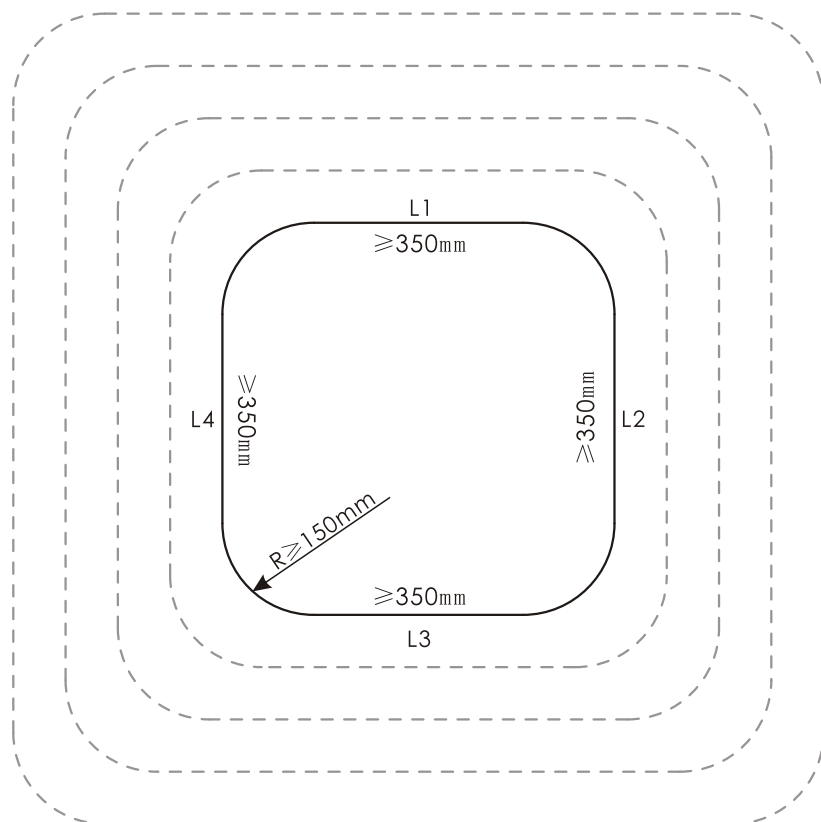

Profile

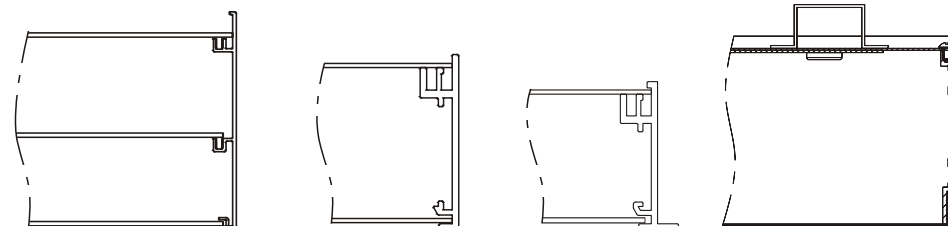

Suspended/Surface Mounted

Trimless Recessed

Trim Recessed

Stretch Fabric

Mounting




Color



Control



Optics




Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
Customized	Single light / Linkable	220-240VAC	100W/m²-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic/Stretch Fabric	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Standard Square Panel

For
Stock

Light Distribution

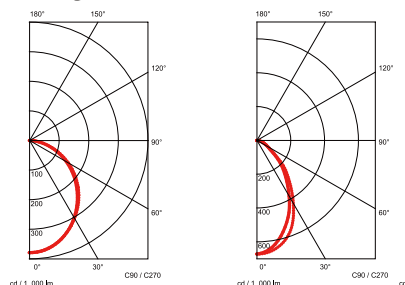

Opal direction

MPR direction

Color



Matte White





Matte Black



Matte Silver

Dimension



Data sheet

Item	Size	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Driver	Control
SQC350	L350xH82mm	220-240VAC	35W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
SQC450	L450xH82mm	220-240VAC	45W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
SQC600	L600xH82mm	220-240VAC	57W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
SQC900	L900xH82mm	220-240VAC	84W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)
SQC1200	L1200xH82mm	220-240VAC	153W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80/CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI2 DALI DT8(tunable white)

*Options:

- Presence and light sensors -2700K or other CCT
- Emergency: 1h or 3h -100-277VAC

Approval



ERP



Control



3 CCT Switchable



0-10V Dimmable



On-off

Rounded-edge Triangular Panel

The architecture itself serves as a city's poetry, and the rounded-edge triangular panel lights are the rise and fall of this poem, using soft radiance to paint beautiful imagery for each line. They outline the contours of the buildings, resembling verses of a poem, narrating the city's enduring epochs.

Mounting





Control



Color




Optics

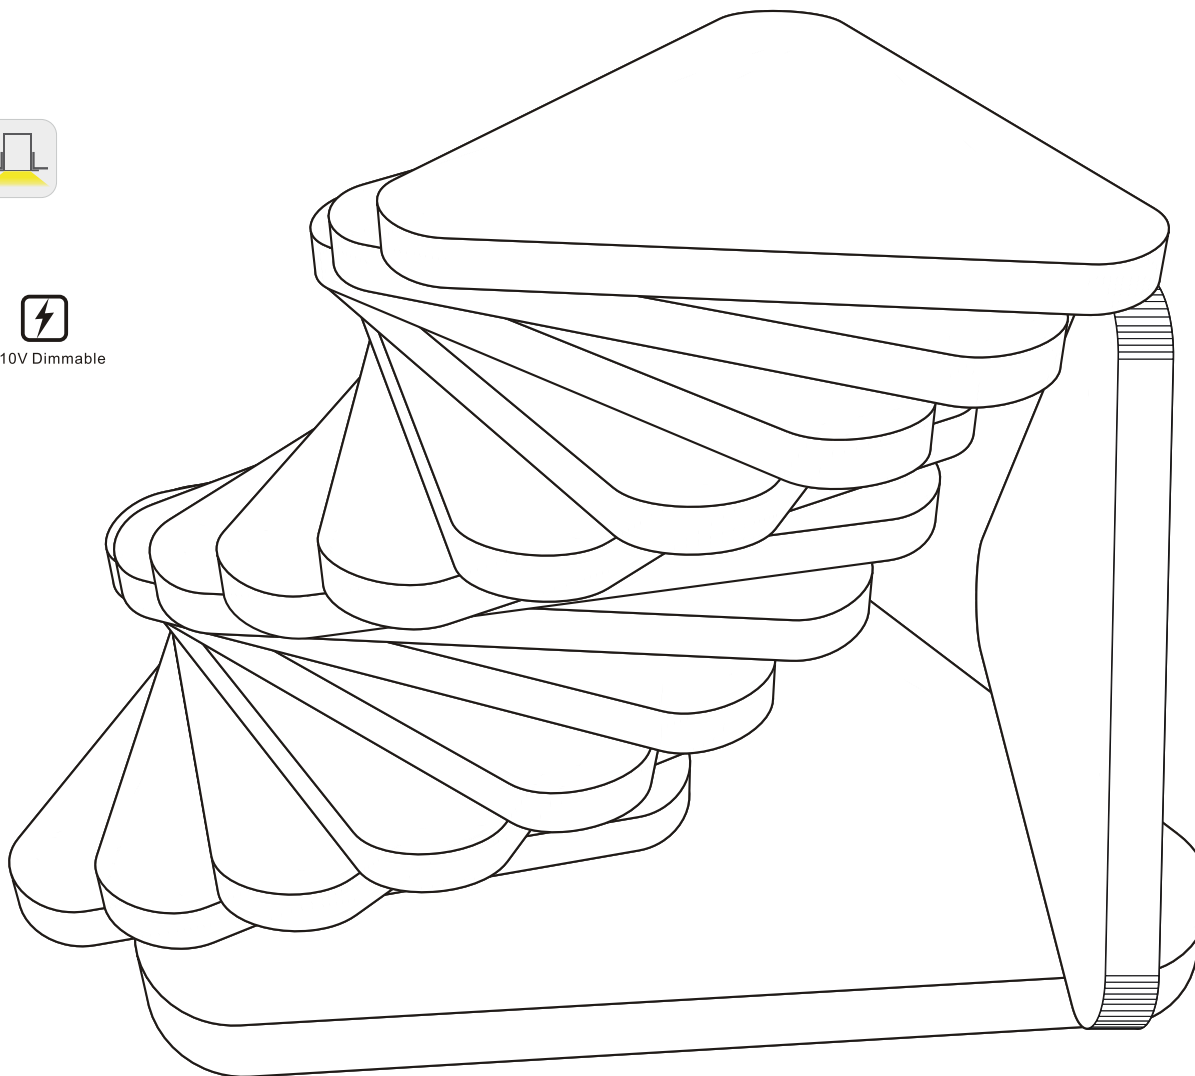




Customized Options


For projects

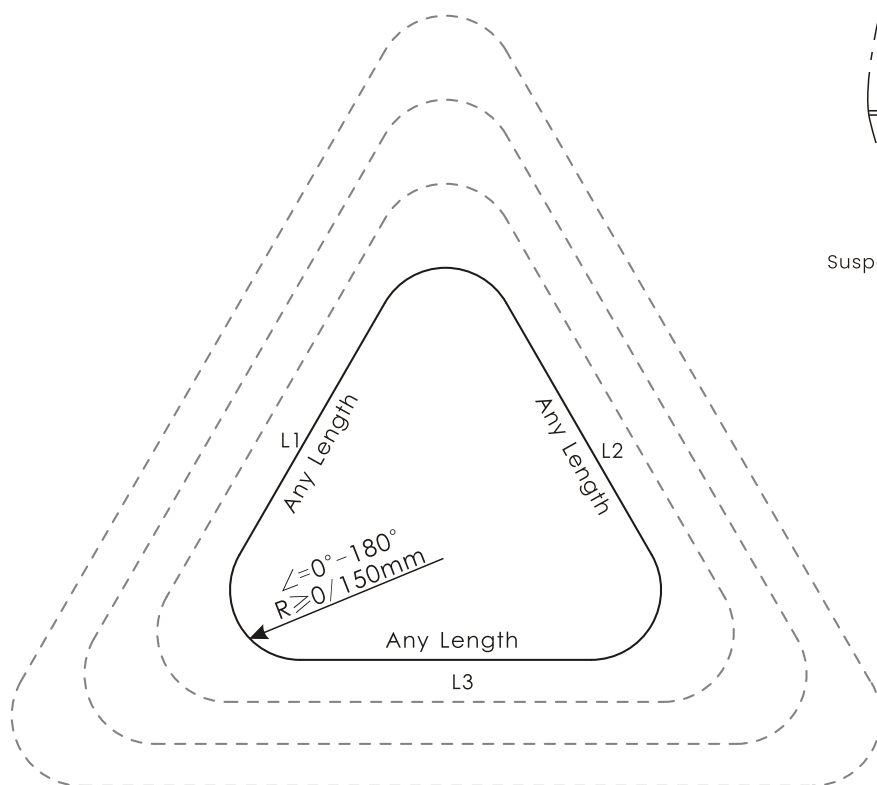


Profile




Suspended/Surface Mounted



Trimless Recessed



Trim Recessed



Stretch Fabric

Mounting




Color



Control



Optics



Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
Customized	Single light / Linkable	220-240VAC	100W/m²-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic/Stretch Fabric	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Rounded-edge Polygonal panel

Amid the canvas of the city, as the night quietly envelops, a mysterious interplay unfolds—a perfect fusion of rounded-edge polygonal panel lights and architecture. Like an artist's palette, they transform the city's canvas into a vivid and colorful dream.


Mounting




Color




Optics




Control

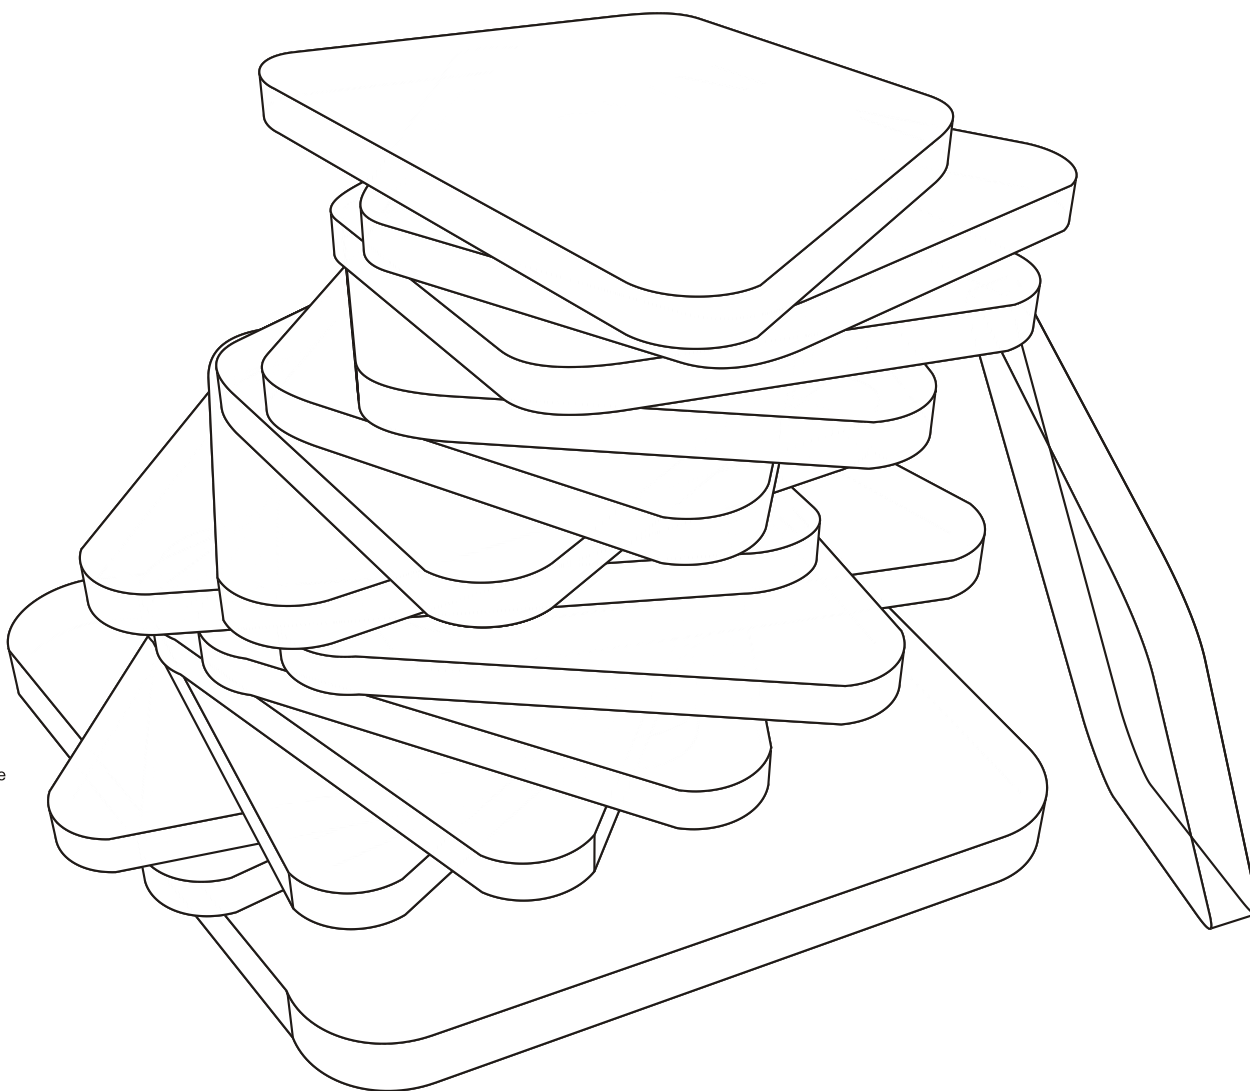

Customized Options For projects

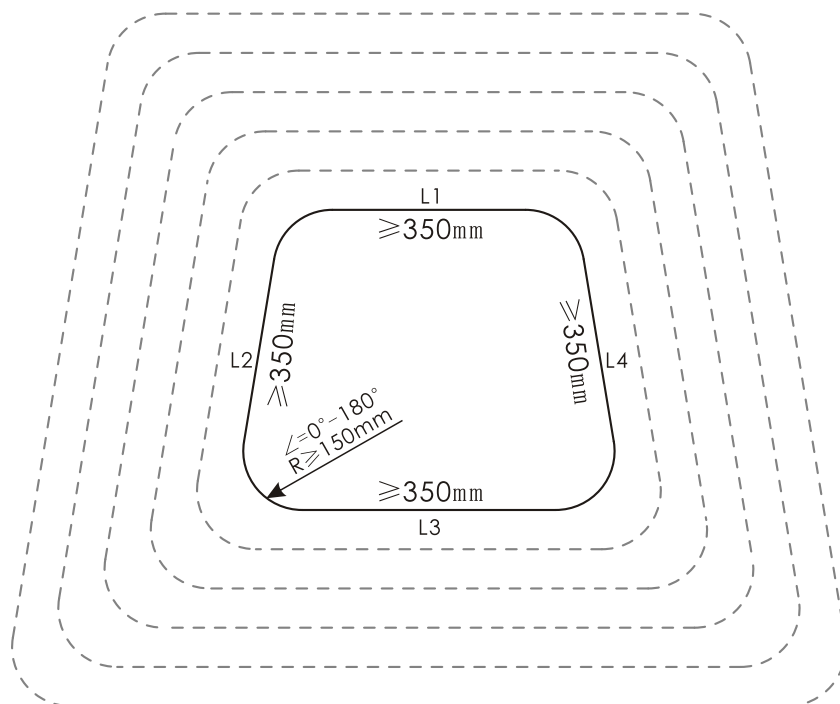

Profile

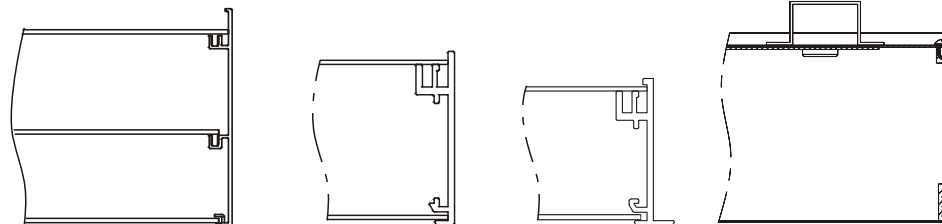

Suspended/Surface Mounted

Trimless Recessed

Trim Recessed

Stretch Fabric

Mounting




Color



Control




Optics



Specification

Size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Control
Customized	Single light / Linkable	220-240VAC	100W/m²-Customized W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic/Stretch Fabric	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	ON-OFF/DALI 2/0-10V /DALI DT8(tunable white)

Shape it as you want

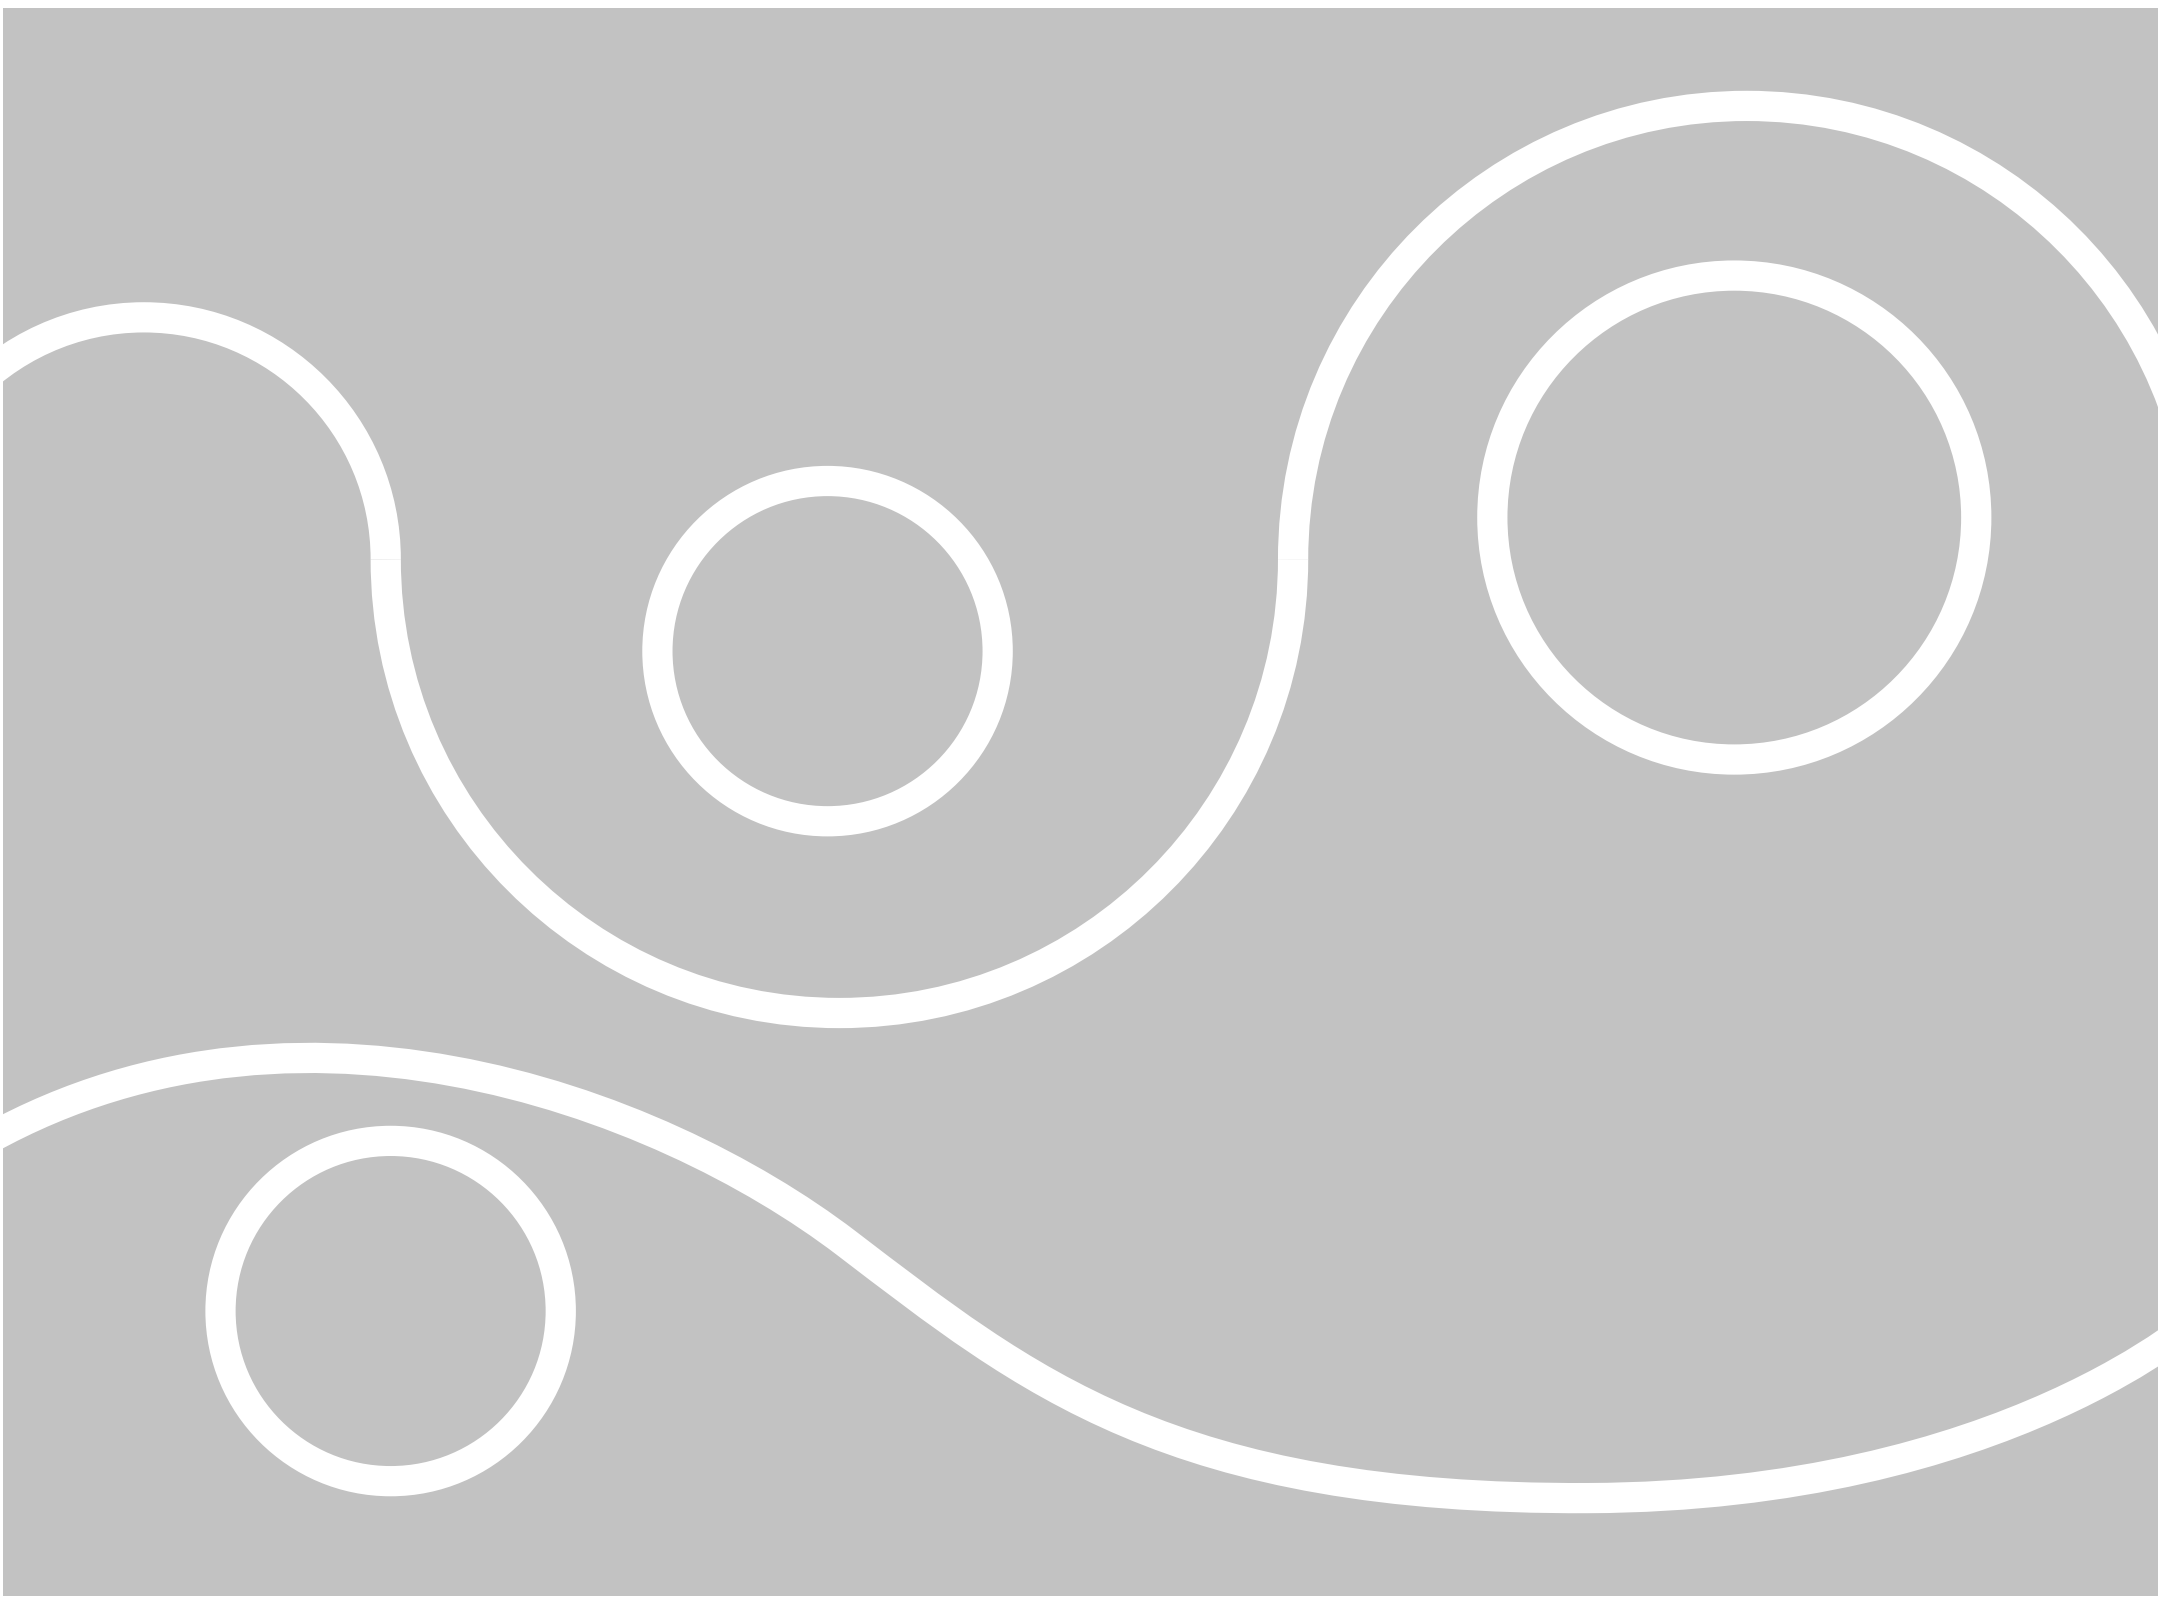



Shenzhen litofis lighting technology Co.,Ltd.

Marketing and R&D center:

Add: 4th Floor, 1st Building, Jinjijia Technology Park, Jinke Road, Nanwan, Longgang District, Shenzhen, China

Tel: 0086-18928443573 Email: info@litofis.com

Factory:

Add: 6th Floor, Building B, Zone A, Changyin Technology Innovation Park, 10 Binnong 1st Road, Meltang, Huangjiang, Dongguan, China

Tel: 0086-13480144347 Email: info@litofis.com

www.litofis.com